


Specification

- Size: 54.3 mm × 94.0 mm
- Free to set up time, value, given time.
- Warning sound for last 30 seconds.
- AC 1250W DC 500Watt electrical relay capacity.
- Controls electrical devices (TV, Massage chair..) power.

Connection

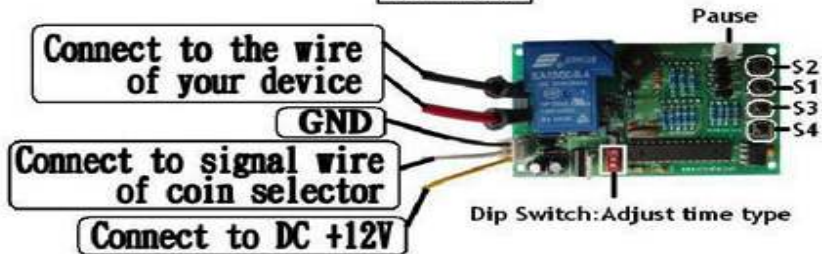

Note: Put on the wire for pausing if it is needed.

Setting

- ※ **GIVEN TIME and VALUE:** User can get extra free time when the amount reach the value you have set up during the working time.
- If the function of GIVEN TIME is **not needed**, please follow *No.1-No.5*.
 - If the function of GIVEN TIME is **needed**, please follow *No.1-No.4* and *No.6-No.9*.

1. Please choose **TIME TYPE** by Dip switch . **ON:**HOUR:MINUTE **OPPOSITE :** MINUTE:SECOND.
2. Please press button "S4", and then please use button "S1" and button "S2" to set up **VALUE**.
3. Please press button "S4", and then use button "S1" and "S2" to set up **TIME** for **FIRST 2 NUMBER** .
4. Please press button "S4", and then use button "S1" and "S2" to set up **TIME** for **LAST 2 NUMBER** .
5. Please press button "S4" 3 times to finish.
6. Please press button "S4", and then use button "S1" and "S2" to set up **VALUE OF GIVEN TIME**.
7. Please press button "S4". Use button "S1" and "S2" to set up **GIVEN TIME** for **FIRST 2 NUMBER** .
8. Please press button "S4". Use button "S1" and "S2" to set up **GIVEN TIME** for **LAST 2 NUMBER** .
9. Please press button "S4" to finish.

EXAMPLE

